


SIGNATURE SERIES 200 HEAVY DUTY GTW H-BACK HINGE

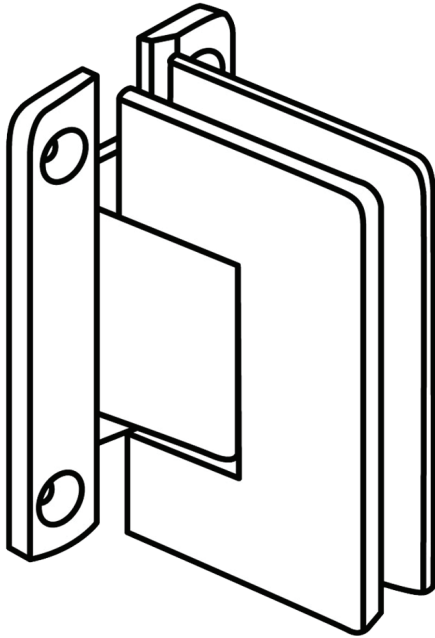

SPECIFICATIONS

For 3/8" (10 mm) and 1/2" (12 mm) glass,

- use two (2) hinges with a maximum weight of 110 lb (50 kg) and a width of 36" (914 mm)
- use three (3) hinges with a maximum weight of 140 lb (63 kg) and a width of 36" (914 mm)

ASSEMBLY

For 3/8" (10 mm) glass use one thick rubber on each side

For 1/2" (12 mm) glass use one thin rubber on each side

CAUTION

Power tools should not be used to compress the hinge on the glass.



**Southeastern
Aluminum
Products**

| *Maximum Door Capacities | 3/8" (10 mm) Glass | | 1/2" (12 mm) Glass | |
|--------------------------|--------------------|--------------|--------------------|--------------|
| | Weight | Width | Weight | Width |
| Using 2 Hinges | 110 lbs. (50 kg) | 36" (914 mm) | 110 lbs. (50 kg) | 36" (914 mm) |
| Using 3 Hinges | 140 lbs. (63 kg) | 36" (914 mm) | 140 lbs. (63 kg) | 36" (914 mm) |

SIGNATURE SERIES 200 HEAVY DUTY GTW H-BACK HINGE

